


DP-60HS Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-60HS
Range (Switchable)	3 (X1, X5, X10 Attenuator)
Input Impedance	1 M Ω // 10 PF
Bandwidth (-3dB)	X1: 30 MHz, X5: 60 MHz, X10: 60 MHz
Maximum Operation Voltage (DC+ AC p-p)	X1: 7 Vp-p, X5: 35 Vp-p, X10: 70 Vp-p
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1 MHz: > 300 : 1
Noise	\leq 1 m Vrms
Accuracy	$\leq \pm$ 2% (DCV or ACV 1 KHz)
Maximum Output Voltage	$\leq \pm$ 4 V DC or \leq 8 Vp-p
Power Source	External 9 V DC Adaptor
Other	Over Range Indicator; Separated Design

ACCESSORIES:

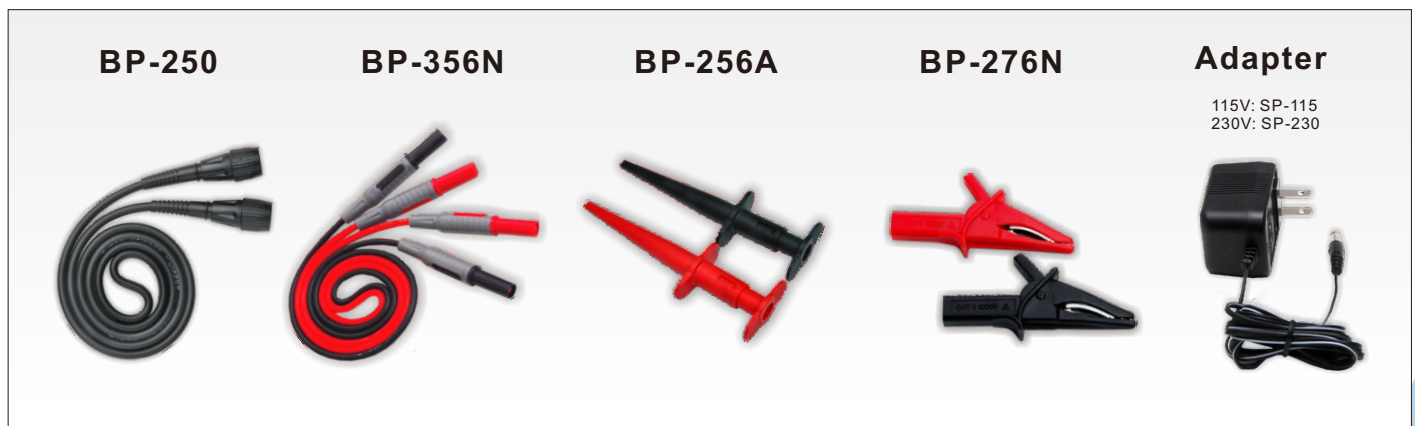

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3; 886-2-86861898

Fax: 886-2-86852081; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail: pintek@pintek.com.tw; pintek@ms26.hinet.net

SALES AGENT